

# CCTV LCD Monitor

15" TFT LCD monitor

XGA resolution

Panel mounted, IP65

EIA, IEC297 rack mounted, 7U

Industrial grade steel construction

High brightness TFT LCD

High contrast ratio

Fast response time

VGA & Composite video input

OSD for screen adjustment



PCL-15

RCL-15

## Specification

Display Type	15" TFT LCD active color
Native Resolution	XGA, 1024 x 768 pixels
Viewing Angle	75° horizontal 70° vertical
Brightness	300 nits or cd/m <sup>2</sup>
Contrast Ratio	400 : 1 typical
Response Time	8ms
Frequency	50 - 75 Hz
Lamp Life Time MTBF	50000 hours
Number of color	16.2 million colors
Pixel Pitch	0.274 x 0.274 mm
Video Scan Frequency	30 to 80KHz (Horizontal), 55-75KHz (Vertical)
Video standard	NTSC / PAL (Auto sensing)
Composite Video Signal Input	0.5 to 2 Vp-p, 75Ω, RCA or BNC
S-video Signal Input	Y : 1Vp-p, C : 0.3Vp-p, 4pin mini DIN
VGA Signal Input	Analog RGB, DB15 (male)
Power Requirement	230 VAC or 12VDC, 17W



# CCTV LCD monitor, 15"

# CCTV LCD Monitor, 15"


## Environment Specification

Operating Temperature	0° to +50° C
Storage temperature	-20° to +60° C


## Mechanical Dimension

Color	Black & White (Customized color welcome)
Dimension	310H x 483W x 48D mm EIA, IEC297 std, Rack mount 358H x 448W x 48D mm Panel mount
Weight	4.5 kg
Packaging Size	620L x 520B x 120H mm

### Panel Mount Version PCL-15

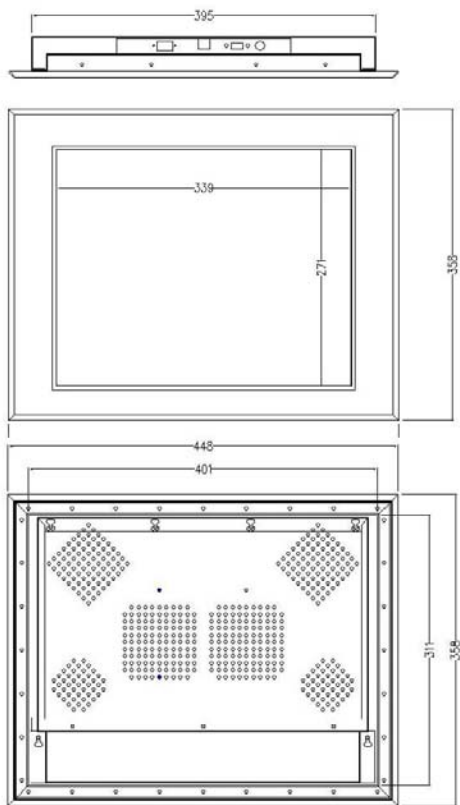

### Rack Mount Version RCL-15

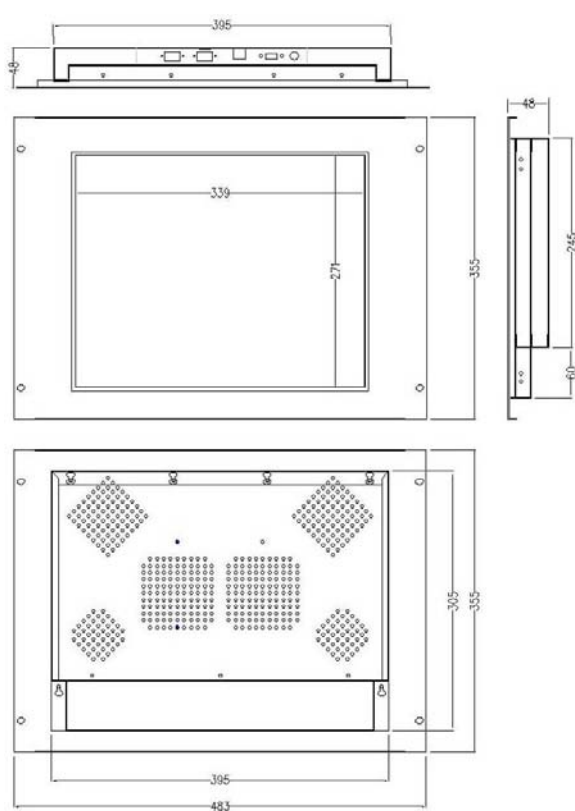

## Ordering Information

Part No : R CL-15

1 - Mounting Type	2 - Monitor Type	3 - LCD Size
P – Panel Mount	CL – Composite input LCD	15 – 15"
R – Rack mount		17 – 17.1"
D – Desktop Mount		19 – 19.1"
O – Open frame mount		20 – 20.1"
		21 – 21.3"

