

CCTV LCD Monitor

CCTV LCD Monitor, 17"

17" TFT LCD monitor

SXGA resolution

Panel mounted, IP65

EIA, IEC297 rack mounted, 7U

Industrial grade steel construction

High brightness TFT LCD

High contrast ratio

Fast response time

VGA, AV & S-video input

OSD for screen adjustment



RCL-17

PCL-17

Specification	
Display Type	17.1" TFT LCD active color
Native Resolution	SXGA, 1280 x 1024 pixels
Viewing Angle	75° horizontal 70° vertical
Brightness	400 nits or cd/m ²
Contrast Ratio	500 : 1 typical
Response Time	8ms
Frequency	50 - 75 Hz
Lamp Life Time MTBF	50000 hours
Number of color	16.2 million colors
Pixel Pitch	0.264 x 0.264 mm
Video Scan Frequency	30 to 80KHz (Horizontal), 55-75KHz (Vertical)
Video standard	NTSC / PAL (Auto sensing)
Composite Video Signal Input	0.5 to 2 Vp-p, 75Ω, RCA or BNC
S-video Signal Input	Y : 1Vp-p, C : 0.3Vp-p, 4pin mini DIN
VGA Signal Input	Analog RGB, DB15 (male)
Power Requirement	230 VAC or 12VDC, 17W



CCTV LCD monitor, 17"

CCTV LCD Monitor, 17"


Environment Specification

Operating Temperature	0° to +50° C
Storage temperature	-20° to +60° C


Mechanical Dimension

Color	Black & White (Customized color welcome)
Dimension	355H x 483W x 48D mm EIA, IEC297 std, Rack mount 358H x 448W x 48D mm Panel mount
Weight	4.5 kg
Packaging Size	620L x 520B x 120H mm

Panel Mount Version PCL-17

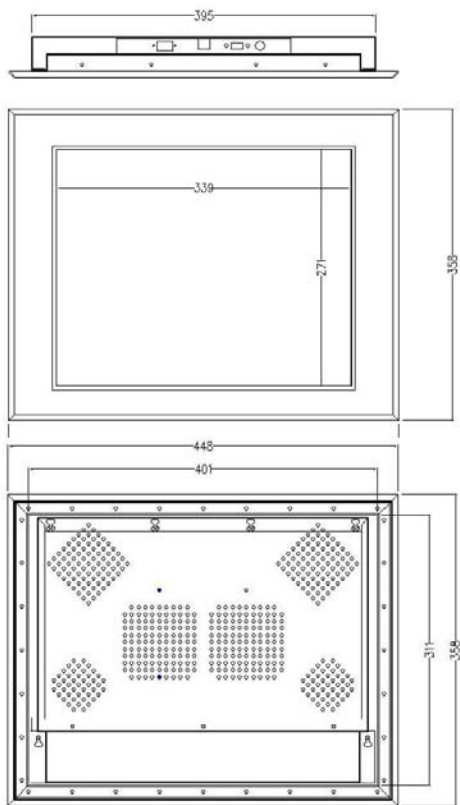

Rack Mount Version RCL-17

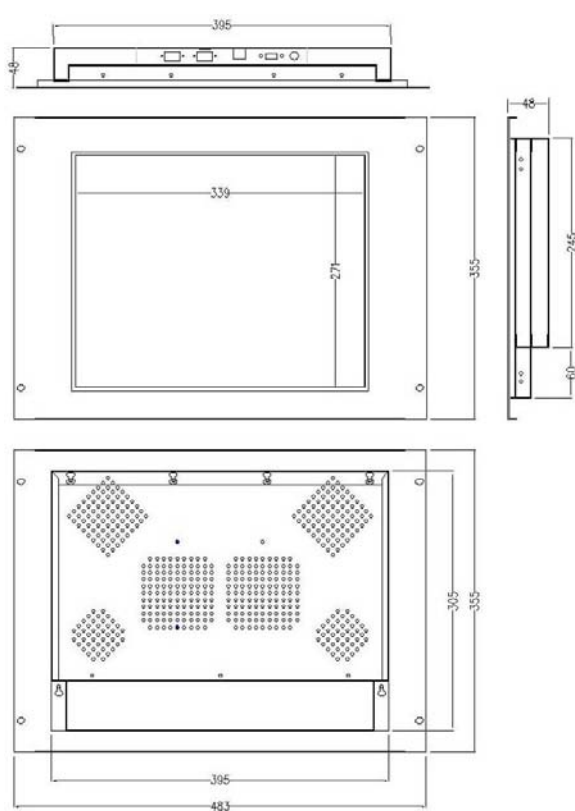

Ordering Information

Part No : R CL-17

1 - Mounting Type	2 - Monitor Type	3 - LCD Size
P – Panel Mount	CL – Composite input LCD	15 – 15.1"
R – Rack mount		17 – 17.1"
D – Desktop Mount		19 – 19.1"
O – Open frame mount		20 – 20.1"
		21 – 21.3"

