

CCTV LCD Monitor

CCTV LCD Monitor, 21"

21.3" TFT LCD monitor

UXGA resolution

Panel mounted, IP65

Industrial grade steel construction

High brightness TFT LCD

High contrast ratio

Fast response time

VGA, AV & S-video input

OSD for screen adjustment



PCL-21

Specification	
Display Type	21.3" TFT LCD active color
Native Resolution	UXGA, 1600 x 1200 pixels
Viewing Angle	89° horizontal 89° vertical
Brightness	400 nits or cd/m ²
Contrast Ratio	900 : 1 typical
Response Time	4ms
Frequency	50 - 75 Hz
Lamp Life Time MTBF	50000 hours
Number of color	16.7 million colors
Pixel Pitch	0.27 x 0.27 mm
Video Scan Frequency	30 to 80KHz (Horizontal), 55-75KHz (Vertical)
Video standard	NTSC / PAL (Auto sensing)
Composite Video Signal Input	0.5 to 2 Vp-p, 75Ω, RCA or BNC
S-video Signal Input	Y : 1Vp-p, C : 0.3Vp-p, 4pin mini DIN
VGA Signal Input	Analog RGB, DB15 (male)
Power Requirement	230 VAC or 12VDC, 25W

CCTV LCD monitor, 21"

CCTV LCD monitor, 21"


Environment Specification

Operating Temperature	0° to +50° C
Storage temperature	-20° to +60° C

Mechanical Dimension

Color	Black & White (Customized color welcome)
Dimension	446H x 542W x 64D mm (Panel mount)
Weight	8.5 kg
Packaging Size	620L x 520B x 120H mm

Panel Mount Version PCL-21

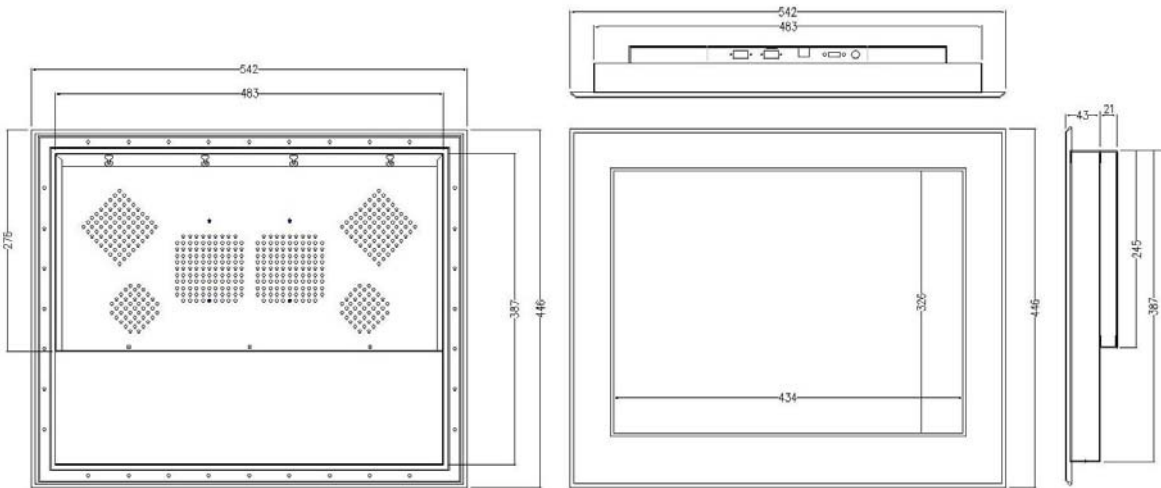

Ordering Information

Part No : P CL-21

1 - Mounting Type	2 - Monitor Type	3 - LCD Size
P – Panel Mount	CL – CCTV LCD monitor	15 – 15.1"
O – Open frame mount		17 – 17.1"
		19 – 19.1"
		20 – 20.1"
		21 – 21.3"

