

CCTV LCD Monitor

CCTV LCD Monitor, 22"

22" TFT LCD monitor

UXGA resolution

Panel mounted, IP65

Industrial grade steel construction

High brightness TFT LCD

High contrast ratio

Fast response time

VGA, AV & S-video input

OSD for screen adjustment



PCL-22

Specification	
Display Type	22" TFT LCD active color
Native Resolution	1680 x 1050 pixels
Viewing Angle	178 deg V and 42
Brightness	400 nits or cd/m ²
Contrast Ratio	1300 : 1 typical
Response Time	4ms
Frequency	50 - 75 Hz
Lamp Life Time MTBF	50000 hours
Number of color	16.7 million colors
Pixel Pitch	0.27 x 0.27 mm
Video Scan Frequency	30 to 80KHz (Horizontal), 55-75KHz (Vertical)
Video standard	NTSC / PAL (Auto sensing)
Composite Video Signal Input	0.5 to 2 Vp-p, 75Ω, RCA or BNC
S-video Signal Input	Y : 1Vp-p, C : 0.3Vp-p, 4pin mini DIN
VGA Signal Input	Analog RGB, DB15 (male)
Power Requirement	230 VAC or 12VDC, 42W max



CCTV LCD monitor, 22"

CCTV LCD monitor, 22"

Environment Specification

Operating Temperature	0° to +50° C
Storage temperature	-20° to +60° C


Mechanical Dimension

Color	Black & White (Customized color welcome)
Dimension	339H x 520W x 92D mm (Desktop mount)
Weight	8.5 kg
Packaging Size	620L x 540B x 120H mm

Desktop Mount Version DCL-22



TOP VIEW

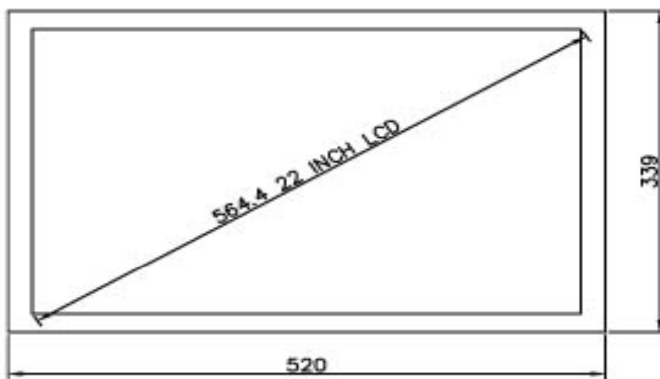

FRONT VIEW



SIDE VIEW

Ordering Information

Part No : **D CL-22**

1 - Mounting Type	2 - Monitor Type	3 - LCD Size
P – Panel Mount D – Desktop Mount O – Open frame mount	CL – Composite input LCD	15 – 15.1” 17 – 17.1” 19 – 19.1” 20 – 20.1” 21 – 21.3” 22 – 22”

