


CLCD - 7300

- ◆ Card empty or less of card detecting function(The alerting capacity can be set)
- ◆ Professional and unique design of the card dispensing function, ensure the stable performance of card dispensing
- ◆ Card thickness adjustment function to dispense the different cards
- ◆ Feeding function can be set to allow or prohibit for different applications
- ◆ Error card bin function to collect the disabled cards
- ◆ Multi card stop position to meet the various requirements
- ◆ SIM card module function on the main board for special use

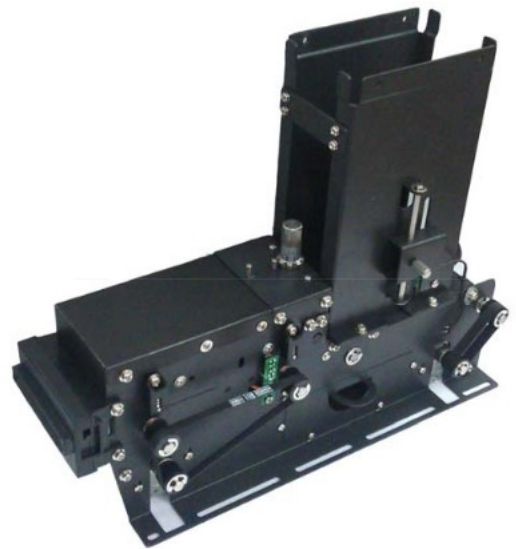


CLCD- 7300

Specification		Error Card Bin Capacity	25 pieces (0.76mm standard cards)
Power Supply	DC24V, 2.0A		
Interface	RS - 232		IC Card Contact
Card Type	IC Card	Memory Card : Atmel series card AT24Cxx(AT24C01/02/04/08/16/32/64) Logic encryption card: Siemens series card, SLE(4428/4442) CPU card: T=0 & T=1	Dispense Speed Rate
	RF Card	TYPE A (S50,S70)	Environment
Card Specs	Width: 54 ± 0.5 mm; Length : 85 ± 0.5 mm Thickness: 0.5 – 2.0mm, adjustable (Default setting is 0.8mm) Material : paper card or polyester card		Dimension
Stacker Capacity	180 pieces(0.76mm standard cards) Can be expanded to 500 pieces (0.76mm standard cards)		Weight
Stacker Empty Alert	25 – 75pcs ± 2pcs, adjustable (0.76mm standard cards, default setting is 25pcs)		
Error Card Bin Capacity	25 pieces (0.76mm standard cards)		



Closed – loop reserved all rights to make changes to product specifications without further notice. For latest up date on product information, please visit www.closed-loop.biz.

Dimension Drawing

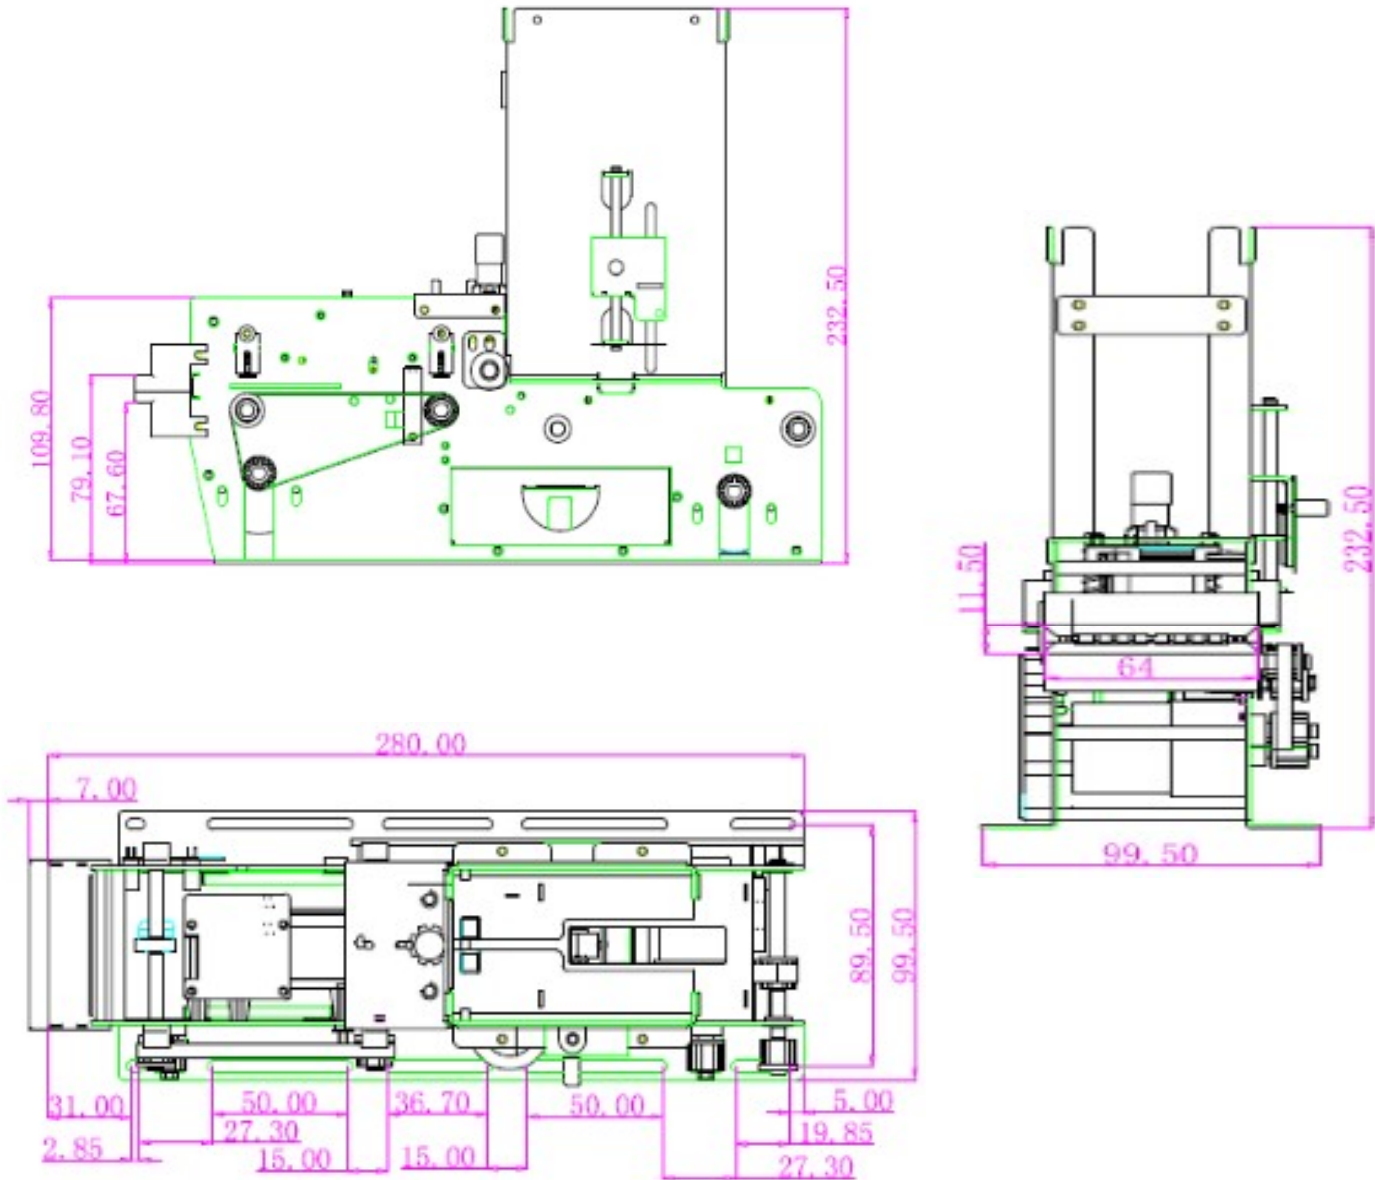

Closed – loop reserved all rights to make changes to product specifications without further notice. For latest up date on product information, please visit www.closed-loop.biz.