

Industrial LCD Monitor, 55"

55" TFT LCD monitor

WUXGA resolution

Anti-glare Glass

Panel mounted, IP20

Industrial grade aluminum chassis

High brightness TFT LCD

High contrast ratio

Fast response time

VGA, Y Pb Pr & HDMI input

OSD for screen adjustment



DCHL-55

Specification

Display Type	55" TFT LCD active color
Native Resolution	WUXGA, 1920 x 1080 pixels
Orientation	Landscape or Portrait
Viewing Angle	176° horizontal 176° vertical
Brightness	400 nits or cd/m ²
Contrast Ratio	4000: 1 typical
Response Time	4ms (min), 6ms (average)
Frequency	50 - 75 Hz
Lamp Life Time MTBF	60000 hours
Number of color	16.77 million colors
Pixel Pitch	0.21 x 0.63 mm
Video Scan Frequency	30 to 80KHz (Horizontal), 55-75KHz (Vertical)
Video standard	NTSC , PAL, SECAM (Auto sensing)
Composite Video Signal Input	0.5 to 2 Vp-p, 75Ω, BNC
PC / AV Digital Input	VGA, HDMI
S-video Signal Input	Y : 1Vp-p, C : 0.3Vp-p, 4pin mini DIN
VGA Signal Input	Analog RGB, DB15 (male) & DVI
Power Requirement	230 VAC, 350W, IEC320 type

Industrial LCD Monitor, 55"




Industrial TFT LCD Monitor, 55"

Industrial LCD Monitor, 55"

Mechanical Dimension

Color	Black & Silver (Customized color welcome)
Dimension	742H x 1270W x 96D mm
Net Weight	32 kg
Packaging Size	1370L x 200B x 850H mm

Desktop Version DCHL-55

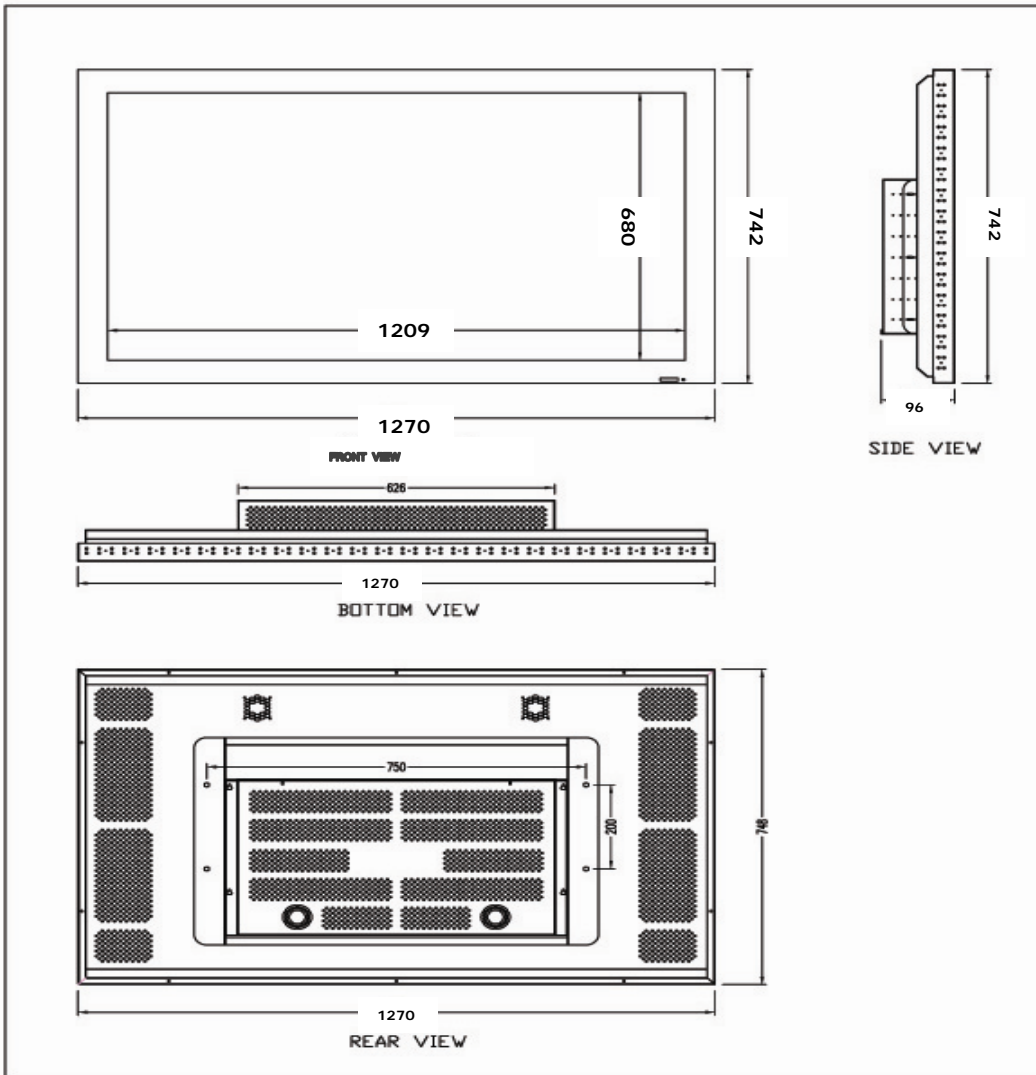

Ordering Information

Part No : **DCHL-55**

1 - Mounting Type	2 - Input Type	3 - Panel Type	4 - LCD Size
P - Panel Mount	C - Composite video	L - TFT LCD	32-32"
R - Rack Mount	CH - Composite video + HDMI		42-42"
D - Desktop Mount	D - DVI		46-46"
O - Open frame mount			52-52"
			65-65"

