

# CCTV LCD Monitor

19" TFT LCD monitor, wide screen

SWXGA resolution

Panel mounted, IP65

Industrial grade steel construction

High brightness TFT LCD

High contrast ratio

Fast response time

VGA, AV & S-video input

OSD for screen adjustment



DCL-19W

PCL-19W

## Specification

Display Type	19.0" TFT LCD active color
Native Resolution	SWXGA, 1440 x 900 pixels
Viewing Angle	75° horizontal 75° vertical
Brightness	350 nits or cd/m <sup>2</sup>
Contrast Ratio	800 : 1 typical
Response Time	4ms
Frequency	50 - 75 Hz
Lamp Life Time MTBF	50000 hours
Number of color	16.7 million colors
Pixel Pitch	0.294 x 0.294 mm
Video Scan Frequency	30 to 80KHz (Horizontal), 55-75KHz (Vertical)
Video standard	NTSC / PAL (Auto sensing)
Composite Video Signal Input	0.5 to 2 Vp-p, 75Ω, RCA or BNC
S-video Signal Input	Y : 1Vp-p, C : 0.3Vp-p, 4pin mini DIN
VGA Signal Input	Analog RGB, DB15 (male)
Power Requirement	230 VAC or 12VDC, 20.5W,

CCTV LCD Monitor, 19" Wide Screen

# CCTV LCD monitor, 19" Wide Screen

CCTV LCD monitor, 19" Wide screen


## Environment Specification

Operating Temperature	0° to +50° C
Storage temperature	-20° to +60° C


## Mechanical Dimension

Color	Black & White (Customized color welcome)
Dimension	355H x 483W x 48D mm IEC297 (Rack mount) 309H x 459W x 65D mm ( Desktop mount )
Weight	5.8 kg
Packaging Size	620L x 520B x 120H mm

## Desktop Mount Version DCL-19

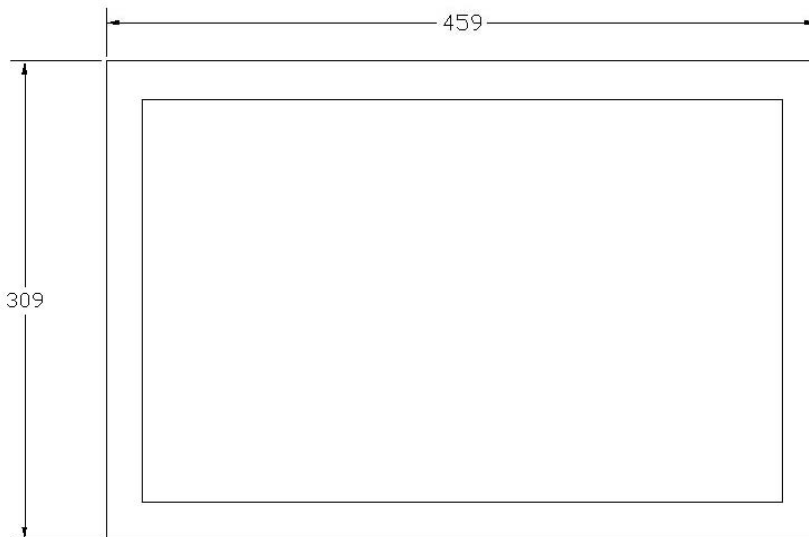

FRONT VIEW

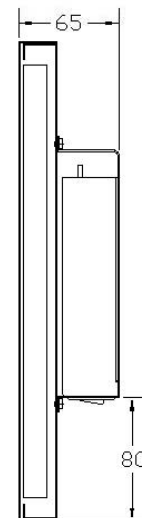

SIDE VIEW

## Ordering Information

Part No : **DCL- 19 W**

1 - Mounting Type	2 - Monitor Type	3 - LCD Size	4 - Aspect Ratio
P – Panel Mount	CL – Composite input LCD	15 – 15.1"	Blank – 4:3 W – 16:10
R – Rack Mount		17 – 17.1"	
D – Desktop Mount		19 – 19.1"	
O – Open frame mount		20 – 20.1"	
		21 – 21.2"	

