

Industrial LCD Monitor, 42"

42" TFT LCD monitor

WXGA resolution

Anti-glare Glass

Panel mounted, IP20

Industrial grade steel construction

High brightness TFT LCD

High contrast ratio

Fast response time

VGA, AV & HDMI input

OSD for screen adjustment



DCL-42

Industrial LCD Monitor, 42"

Specification	
Display Type	42" TFT LCD active color
Native Resolution	WXGA, 1366 x 768 pixels
Orientation	Landscape / Portrait
Viewing Angle	178° horizontal 178° vertical
Brightness	600 nits or cd/m ²
Contrast Ratio	1200 : 1 typical
Response Time	4ms(min) , 6ms (average)
Frequency	50 - 75 Hz
Lamp Life Time MTBF	40000 hours @ 50% brightness
Number of color	16.77 million colors
Pixel Pitch	0.681mm
Video Scan Frequency	30 to 80KHz (Horizontal), 55-75KHz (Vertical)
Video standard	NTSC / PAL / SECAM (Auto sensing)
PC / AV Digital Signal Input	VGA, AV, HDMI
Composite Video Signal Input	0.5 to 2 Vp-p, 75Ω, RCA or BNC
S-video Signal Input	Y : 1Vp-p, C : 0.3Vp-p, 4pin mini DIN
VGA Signal Input	Analog RGB, DB15 (male)
Power Requirement	230 VAC, 200W, IEC320 type




Industrial TFT LCD Monitor, 42"

Industrial LCD Monitor, 42"

Mechanical Dimension

Color	Black & Silver (Customized color welcome)
Dimension	616H x 1017W x 96D mm
Net Weight	26 kg
Packaging Size	1400L x 220B x 860H mm

Desktop Version DCL-42

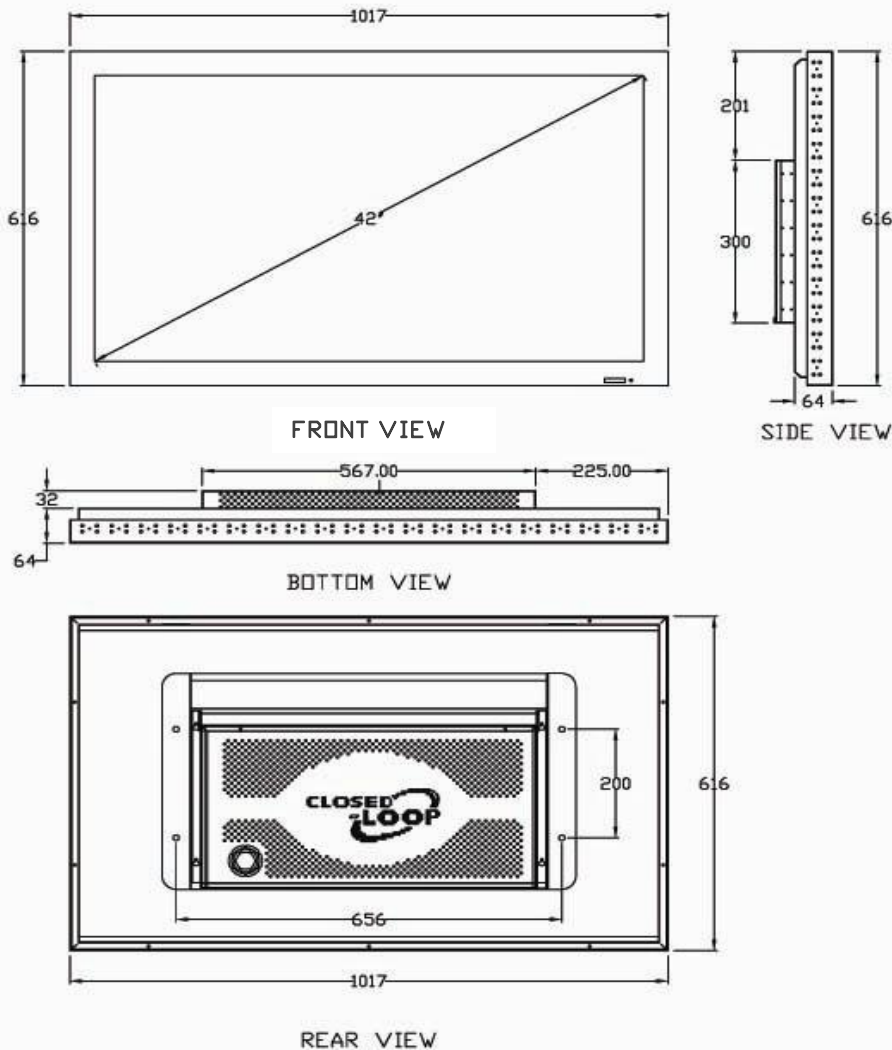

Ordering Information

Part No : DCL-42

1 - Mounting Type	2 - Input Type	3 - Panel Type	4 - LCD Size
P - Panel Mount	C - Composite video	L - TFT LCD	20 - 20.1"
R - Rack Mount	CH - Composite video + HDMI		21 - 21.3"
D - Desktop Mount	D - DVI		22 - 22.3"
O - Open frame mount			32 - 32"
			42 - 42"

