

Industrial Touch Monitor, 32"

32" TFT LCD monitor

WXGA resolution

Panel mounted, IP20

Industrial grade aluminium construction

High brightness TFT LCD

High contrast ratio

Fast response time

VGA, BNC & HDMI input

OSD for screen adjustment



DLT-32SU

Specification	
Display Type	32" TFT LCD active color
Native Resolution	WXGA, 1366 x 768 pixels
Viewing Angle	178° horizontal 178° vertical
Brightness	400 nits or cd/m ²
Contrast Ratio	5000 : 1 typical
Response Time	8ms
Frequency	50 - 75 Hz
Lamp Life Time MTBF	60000 hours
Number of color	16.7 million colors
Pixel Pitch	0.51075(H) x 0.51075(V)
Video Scan Frequency	30 to 80KHz (Horizontal), 55-75KHz (Vertical)
Video standard	NTSC / PAL (Auto sensing)
Composite Video Signal Input	0.5 to 2 Vp-p, 75Ω, RCA or BNC
S-video Signal Input	Y : 1Vp-p, C : 0.3Vp-p, 4pin mini DIN
VGA Signal Input	Analog RGB, DB15 (male)
Power Requirement	230 VAC, 50W, IEC320 type

Industrial LCD Touch Monitor, 32"




Industrial LCD Touch Monitor, 32"

Industrial LCD Monitor, 32"

Mechanical Dimension

Color	Black & Silver (Customized color welcome)
Dimension	491H x 801W x 126D mm
Net Weight	15 kg
Packaging Size	1400L x 220B x 860H mm

Desktop Version DLT-32PU

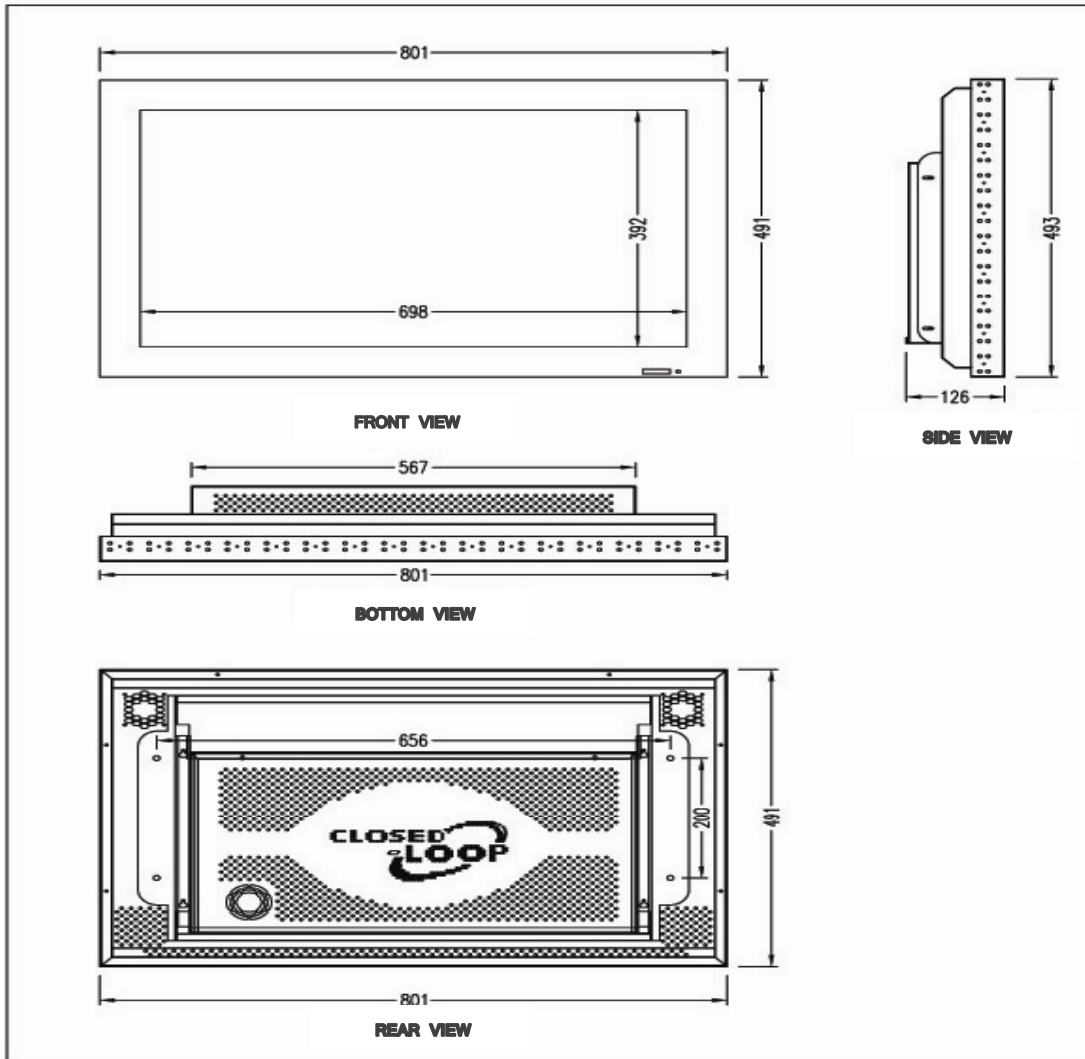

Ordering Information

Part No : **DLT-32 SU**

1 - Mounting Type	2 - Monitor Type	3 - Touch screen	4 - LCD Size	5 - Touch screen Type	6 - Connector Type
P - Panel Mount R - Rack Mount D - Desktop Mount O - Open frame mount	C - Composite video CH - Composite video + HDMI D - DVI L - TFT LCD	T - Touch screen Option Blank - No touch screen, glass panel	20 - 20.1" 21 - 21.3" 22 - 22" 32 - 32" 42 - 42"	P - Projected Capacitive Touch S - SAW I - Infrared C - Capacitive	U - USB Connection

