

Digital Portrait, 42" LCD

Digital Portrait 42"

Feature


Large format, life size
High resolution HD, 1366x768
Wide Screen 16:9 format
Built-in Player
Portability or easy installation
Modular Design, Easy Maintenance

Application

Portable

- Advertising Signage
- Food and Beverage menu or promotion
- Reception & Entertainment
- Casino
- Banking & Finance
- Exhibition & Road Show
- Fashion Show

DS-8242

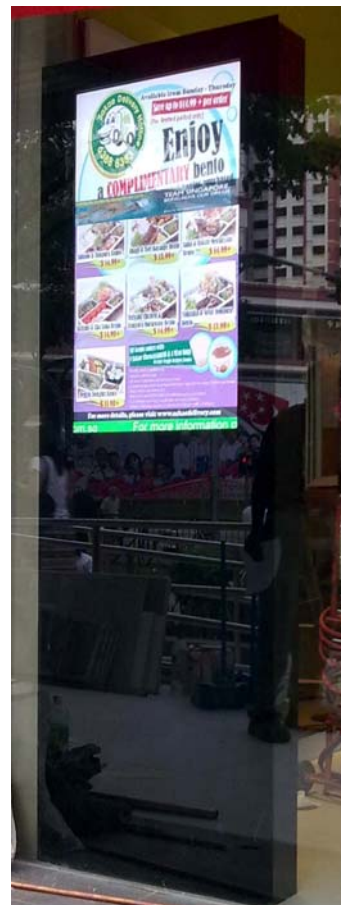

Graphic Engine Type	Pentium Atom
Processor	Intel Atom 1.6GHz
Hard Disk	80G byte 2.5" HDD
System Memory	1GB
Video Memory	256M byte
Ethernet	10/100Mbps
Wireless LAN (Optional)	Wifi 54Mbps
Audio	Speaker, Mic-in, Line-in
Keyboard & mouse	USB connection
Broadband	Mobile broadband, USB

Graphic Engine Options	
Disk On Module (DOM)	Up to 8GB
Hard Disk	2.5" HDD available
System Memory	up to 2GB max
Ethernet, wired	Up to 1Gbps
Operating System	Linux, Windows XP



Closed-loop reserved all rights to make changes to product specifications without further notice.
For latest update on product information, please visit www.closed-loop.biz

Digital Portrait, Technical Specification, IP20

Technical Specification

Mechanical Specification	42" TFT LCD Panel
Display Size (Diagonal)	42Inch
Active Area	940 (V) x 530 (H) mm
Native Resolution	WXGA, 1366 x 768 pixels
Pixel Size	0.227mm x 0.681mm x RGB
Digital Portrait Overall Size	2,200.0(H) x 750.0(W) x 150(D) mm
Surface Treatment	Anti glare, low reflection coating Hard coating: 2H
Digital Signage Weight	42 kg
Packaging Size	2,500 (L) x 850 (W) x 200 (H) mm
Ventillation Fan	4" , 90CFM, 2nos
Electrical Specification	42" TFT LCD Panel
Viewing Angle	178° horizontal 178° vertical
Brightness	500 nits or cd/m ²
Contrast Ratio	1,600 : 1 (typical)
Response Time	5ms
Frequency	47 - 85 Hz
Lamp Life Time MTBF	50000 hours
Number of color	16.7 million colors
Operating Temperature	0° to +50 °C
Storage Temperature	-20° to +60 °C
LVDS	24 bit Single channel
VGA Signal Output	Analog RGB, DB15 (female) & DVI (female)
Power Requirement	230 VAC, 170W, IEC320 type

Feature



**Neat & Easy to Maintain
Open frame Design**



**Swing frame Design
Enable easy cleaning
of glass wall**



Floor Standing Chassis for quick deployment

