

Panel PC, 17"

Panel PC 17"

17" TFT LCD monitor, SXGA

Quad Core Atom, 2.04 GHz

On-board 10/100/1000 LAN, Video, Audio, HD and PCIe

Panel mounted, IP55

EIA, IEC297 rack mounted, 7U

Industrial grade aluminum construction

Low power consumption, 50W



SPC-17QA

Specification	
Processor Type	Quad Core Atom, 1.9 GHz
Expansion Slots	2 slot , PCI e, mini PCie
System Memory	2 slots up to 8G Byte
I/O Port	10/100/1000 LAN (2), HDMI (2), USB (12), Parallel (1), Serial (4), DIO port (8bit) Audio (Speaker, Mic-in, Line-in),
Power Supply	230 VAC
Display Type	17" TFT LCD active color
Native Resolution	SXGA, 1280 x 1024 pixels
Viewing Angle	75° horizontal 70° vertical
Brightness	250 nits or cd/m ²
Contrast Ratio	450 : 1 typical
Response Time	8ms
Frequency	50 - 75 Hz
Lamp Life MTBF	50000 hours
Number of color	16.7 million colors
Pixel Pitch	0.294 x 0.294 mm


Environment	
Operating Temperature	0° to +60° C
Storage temperature	-20° to +70° C
Touch screen	Resistive, Capacitive or SAW
Mechanical Dimension	
Color	Black & White (Customized color welcome)
Dimension	<i>IEC297 std Rack mount</i> 311.5H x 483W x 90D mm <i>Panel mount</i> 344.0H x 444W x 90D mm
Weight	7.5 kg
Packaging Size	595L x 380B x 80H mm
Optional OS	Windows 7 OS, Windows 10 OS
Optional Drive	CD-RW




Closed-loop reserved all rights to make changes to product specifications without further notice.
For latest update on product information, please visit www.closed-loop.biz




Panel PC 17"

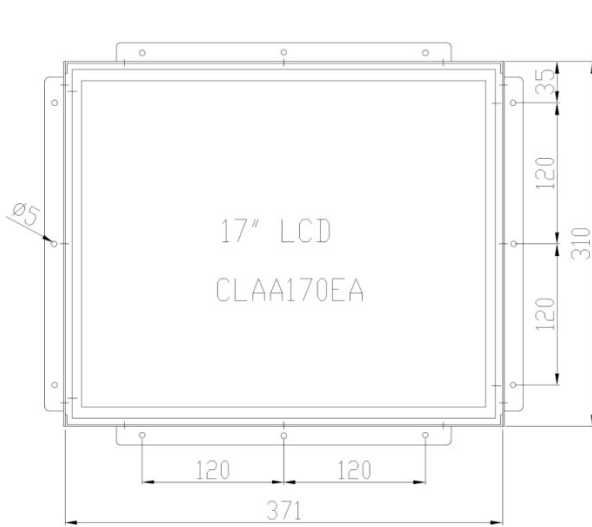

FRONT VIEW

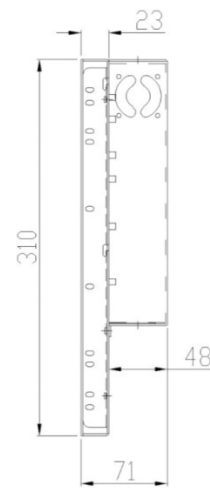

SIDE VIEW

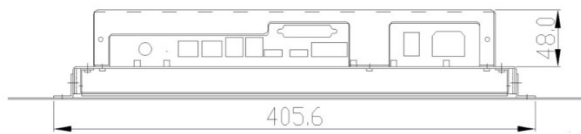

BOTTOM VIEW

Ordering Information

Part No : SPC-17PR-QA

1 - Product	2 - LCD Size	3 - Mounting Type	4 - Touch Screen Type	5 - CPU
SPC – Single panel PC	15 – 15.0" 17 – 17.0" 19 – 19.0" 20 – 20.1" 21 – 21.3" 42 – 42.0"	P – Panel Mount D – Desktop Mount V – VESA Mount O – Open frame mount	R – Resistive C – Capacitive S – Surface Acoustic Wave I – Infra-red	QA – Quad Core Atom DA – Dual Core atom

Panel PC 17"

